

A low-angle photograph of a worker in a yellow hard hat and dark clothing standing on a multi-level aluminum scaffold. The scaffold is positioned against a modern building with a grid of windows and a dark facade. The sky is a clear, bright blue. The scaffold's structure is made of silver-colored aluminum poles and cross-braces. The worker is on the uppermost level, leaning forward. The overall scene is brightly lit, suggesting a clear day.

METALTECH

**ALUMINUM
SCAFFOLDING**

**BUILT TOUGH FOR
SAFETY**

ALUMINUM SCAFFOLDING ADVANTAGES

Metaltech's aluminum scaffolds are our lightest range of scaffolding. It is a high strength system, designed for quick and easy assembly. The aluminum is a flexible and low maintenance solution used for all jobsite work. Our Span 300 and 400 towers are available in narrow and wide width and in heights ranging from 6' to 41'. They are compatible with Instant Upright, Alufase and Vault Scaffolding.[†]



LIGHTWEIGHT INSTALLATION



QUICK & EASY ASSEMBLY



HIGH STRENGTH SYSTEM



HIGHLY VERSATILE



HIGH DURABILITY - 6063 AEROSPACE GRADE ALUMINUM ALLOY





NO TOOLS REQUIRED

From adjustable legs to toeboards, no tools is required to build a tower; brace hooks snap into position with a large 225° contact area to give a firm grip. Frames use interlock clips and outriggers are secured with clamps.



COLOR-CODED BRACES

Our braces have a color-coded ring at each end for quick identification and faster assembly time.



CUSTOM ACCESS SOLUTIONS

Our engineering and design team offers fast, efficient and safe solutions to access problems using standard components wherever possible.



SAFETY FACTOR

The load capacity is based on a 4:1 safety factor in conformity with OSHA 29 CFR PT.1926 standard, ANSI/ASSE A10.8 - 2011 and CSA S269.2 standard.



DURABILITY & QUALITY

Spans 300 and 400 mobile tower systems with cold-formed joint, designed and built to provide three times the strength and durability of traditional welded joints.



FLUTED FRAME RUNGS

Provides better grip and increases slip resistance when climbing frames during assembly or once erected.

ALUMINUM TOWER SPAN 300 KITS



COMPATIBLE:
Instant Upright, Alufuse
and Vault Scaffolding.†

STANDARDS:

Meets ANSI/ASSE A10.8 - 2011
OSHA 29CFR Part 1926
CAN/CSA S269.2



AL-K3007

The kits shown below are for 8'-2 1/4" (2.5 m) platform lengths. They give an example of the quantity of items required for assembly. Equivalent kits for 6'-6 3/4" and 10' platform lengths are also available. Please refer to the next page to obtain the item number corresponding to the desired platform length.

For any assistance, please contact customer service.

SPAN 300 NARROW TOWER KITS

MODEL	MAXIMUM PLATFORM HEIGHT	WEIGHT	LOAD CAPACITY	TOWER KIT DIMENSIONS (W x D x H)	NARROW FRAME	NARROW GUARDRAIL	GUARDRAIL BRACING	DIAGONAL BRACE	HORIZONTAL BRACE	TRAPDOOR PLATFORM	NARROW TOEBOARD SET	POLYURETHANE CASTER	SCREW JACK	ADJUSTABLE OUTRIGGER	
					AL-F3001	AL-G3000	AL-G4101	AL-D0002	AL-H0002	AL-P0002	AL-T0102	AL-C0002	AL-J0001	AL-O0000	AL-O0002
AL-K3007	13'-1 1/2" (4 M)	364 LB (166 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 16'-8 1/2" (2.496 X 0.677 X 5.092 M)	4	2	2	4	5	2	1	4	4	4	0
AL-K3013	19'-8 1/4" (6 M)	472 LB (215 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 23'-8 1/4" (2.496 X 0.677 X 7.092 M)	6	2	2	7	9	3	1	4	4	4	0
AL-K3019	26'-3" (8 M)	589 LB (268 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 29'-10" (2.496 X 0.677 X 9.092 M)	8	2	2	9	13	4	1	4	4	0	4

SPAN 300 WIDE TOWER KITS

MODEL	MAXIMUM PLATFORM HEIGHT	WEIGHT	LOAD CAPACITY	TOWER KIT DIMENSIONS (W x D x H)	WIDE FRAME	WIDE GUARDRAIL	GUARDRAIL BRACING	DIAGONAL BRACE	HORIZONTAL BRACE	PLATFORM	TRAPDOOR PLATFORM	WIDE TOEBOARD SET	POLYURETHANE CASTER	SCREW JACK	ADJUSTABLE OUTRIGGER	
					AL-F3003	AL-G3001	AL-G4101	AL-D0002	AL-H0002	AL-P0101	AL-P0002	AL-T0103	AL-C0002	AL-J0001	AL-O0000	AL-O0002
AL-K3028	13'-1 1/2" (4 M)	496 LB (225 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 16'-8 1/2" (2.496 X 1.290 X 5.092 M)	4	2	2	8	5	2	2	1	4	4	4	0
AL-K3034	19'-8 1/4" (6 M)	658 LB (300 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 23'-8 1/4" (2.496 X 1.290 X 7.092 M)	6	2	2	12	9	3	3	1	4	4	4	0
AL-K3040	26'-3" (8 M)	821 LB (373 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 29'-10" (2.496 X 1.290 X 9.092 M)	8	2	2	16	13	4	4	1	4	4	4	0
AL-K3046	32'-9 3/4" (10 M)	997 LB (453 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 36'-4 3/4" (2.496 X 1.290 X 11.092 M)	10	2	2	20	17	5	5	1	4	4	0	4
AL-K3052	39'-4 1/2" (12 M)	1160 LB (527 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 42'-11 3/8" (2.496 X 1.290 X 13.092 M)	12	2	2	24	21	6	6	1	4	4	0	4

† All trademarks and registered trademarks listed above are the property of their respective owners.

SPAN 300 PARTS

DESCRIPTION		DIMENSIONS	WEIGHT	MODEL	
FRAME					
A	NARROW	26 5/8" X 43 1/2" (0.677 X 1.106 M)	12.5 LB (5.7 KG)	AL-F3000	
		26 5/8" X 76 1/8" (0.677 X 1.934 M)	18.7 LB (8.5 KG)	AL-F3001	
B	WIDE	50 3/4" X 43 1/2" (1.290 X 1.106 M)	18.7 LB (8.5 KG)	AL-F3002	
		50 3/4" X 76 1/8" (1.290 X 1.934 M)	24.6 LB (11.2 KG)	AL-F3003	
C	6-STEPS LADDER WITH LATCH	78.7" (2 M)	14 LB (6.4 KG)	AL-L0002	
GUARDRAIL FRAME					
D	NARROW	UPPER PIN SYSTEM	26 5/8" X 32 1/4" (0.677 X 0.818 M)	6 LB (2.7 KG)	AL-G3000
		LOWER PIN SYSTEM	26 5/8" X 44" (0.677 X 1.117 M)	6.2 LB (2.8 KG)	AL-G3002
E	WIDE	UPPER PIN SYSTEM	50 3/4" X 32 1/4" (1.290 X 0.818 M)	8.8 LB (4 KG)	AL-G3001
		LOWER PIN SYSTEM	50 3/4" X 44" (1.290 X 1.117 M)	9 LB (4.1 KG)	AL-G3003

SPAN 300 NARROW FOLDABLE SCAFFOLD KIT

DESCRIPTION	DIMENSIONS	WEIGHT	MODEL
F WITH CASTERS AND TRAPDOOR PLATFORM	6' 3 1/4" X 26 5/8" X 78" (1.912 X 0.677 X 1.980 M)	82.9 LB (37.6 KG)	AL-Q3101

COMPONENTS

DESCRIPTION	DIMENSIONS	COMPATIBLE			WEIGHT	MODEL
		2 M	2.5 M	3 M		
GUARDRAIL AND BRACE						
G GUARDRAIL	6' 3 1/4" (1.912 M)	(C/C)	•		11.3 LB (5.1 KG)	AL-G4100
	8' 2 1/4" (2.496 M)	(C/C)		•	13 LB (5.9 KG)	AL-G4101
	10' (3.048 M)	(C/C)			•	14.5 LB (6.6 KG)
H BRACE DIAGONAL	6' 10" (2.084 M)	(C/C)	•		4 LB (1.8 KG)	AL-D0001
	8' 7 1/2" (2.630 M)	(C/C)		•	4.8 LB (2.2 KG)	AL-D0002
	10' 4 3/8" (3.158 M)	(C/C)			•	5.5 LB (2.5 KG)
I BRACE HORIZONTAL	6' 3 1/4" (1.912 M)	(C/C)	•		3.7 LB (1.7 KG)	AL-B0001
	8' 2 1/4" (2.496 M)	(C/C)		•	4.4 LB (2 KG)	AL-B0002
	10' (3.048 M)	(C/C)			•	5.3 LB (2.4 KG)

ALUMINUM PLATFORM

DESCRIPTION	DIMENSIONS	COMPATIBLE			WEIGHT	MODEL
		2 M	2.5 M	3 M		
J WITH ANTI-SLIP PLYWOOD DECK*	6' 3 1/4" X 24" (1.912 X 0.609 M)	•			30.4 LB (13.8 KG)	AL-P0100
	8' 2 1/4" X 24" (2.496 X 0.609 M)		•		37.9 LB (17.2 KG)	AL-P0101
	10' X 24" (3.048 X 0.609 M)			•	43.3 LB (19.7 KG)	AL-P0102
K WITH TRAPDOOR AND ANTI-SLIP PLYWOOD DECK*	6' 3 1/4" X 24" (1.912 X 0.609 M)	•			31 LB (14.1 KG)	AL-P0001
	8' 2 1/4" X 24" (2.496 X 0.609 M)		•		38.5 LB (17.5 KG)	AL-P0002
	10' X 24" (3.048 X 0.609 M)			•	44 LB (20 KG)	AL-P0003
L WITH CHECKER PLATE DECK	6' 3 1/4" X 24" (1.912 X 0.609 M)	•			30.4 LB (13.8 KG)	AL-P1001
	8' 2 1/4" X 24" (2.496 X 0.609 M)		•		38.5 LB (17.5 KG)	AL-P1003
	10' X 24" (3.048 X 0.609 M)			•	43.3 LB (19.7 KG)	AL-P1005
M WITH TRAPDOOR AND CHECKER PLATE DECK	6' 3 1/4" X 24" (1.912 X 0.609 M)	•			31 LB (14.1 KG)	AL-P1000
	8' 2 1/4" X 24" (2.496 X 0.609 M)		•		38.5 LB (17.5 KG)	AL-P1002
	10' X 24" (3.048 X 0.609 M)			•	44 LB (20 KG)	AL-P1004

WOODEN TOEBOARD SET




DESCRIPTION	DIMENSIONS	COMPATIBLE			WEIGHT	MODEL
		2 M	2.5 M	3 M		
N NARROW	6' 3 1/4" X 27 1/8" (1.912 X 0.689 M)	•			15 LB (6.8 KG)	AL-T0100
	8' 2 1/4" X 27 1/8" (2.496 X 0.689 M)		•		18.8 LB (8.4 KG)	AL-T0102
	10' X 27 1/8" (3.048 X 0.689 M)			•	21.6 LB (9.8 KG)	AL-T0104
N WIDE	6' 3 1/4" X 51 1/8" (1.912 X 1.298 M)	•			19.1 LB (8.7 KG)	AL-T0101
	8' 2 1/4" X 51 1/8" (2.496 X 1.298 M)		•		25.3 LB (11.5 KG)	AL-T0103
	10' X 51 1/8" (3.048 X 1.298 M)			•	31.7 LB (14.4 KG)	AL-T0105

FOLDABLE BASE WITH LOWER PINS SYSTEM

DESCRIPTION	DIMENSIONS	COMPATIBLE			WEIGHT	MODEL
		2 M	2.5 M	3 M		
O NARROW WITH ADJUSTABLE LEGS (W X D X H)	6' 3 1/4" X 26 5/8" X 71" (1.912 X 0.677 X 1.803 M)	•			55.4 LB (25.2 KG)	AL-Q3000
	8' 2 1/4" X 26 5/8" X 71" (2.496 X 0.677 X 1.803 M)		•		57.6 LB (26.2 KG)	AL-Q3001
	10' X 26 5/8" X 71" (3.048 X 0.677 X 1.803 M)			•	59.8 LB (27.2 KG)	AL-Q3002
O WIDE WITH ADJUSTABLE LEGS (W X D X H)	6' 3 1/4" X 50 3/4" X 71" (1.912 X 1.290 X 1.803 M)	•			73.8 LB (33.5 KG)	AL-Q3003
	8' 2 1/4" X 50 3/4" X 71" (2.496 X 1.290 X 1.803 M)		•		76.1 LB (34.6 KG)	AL-Q3004
	10' X 50 3/4" X 71" (3.048 X 1.290 X 1.803 M)			•	78.8 LB (35.8 KG)	AL-Q3005

UNIVERSAL COMPONENTS

DESCRIPTION	DIMENSIONS	COMPATIBLE	WEIGHT	MODEL
P SWIVEL POLYURETHANE CASTER	Ø 5" (0.125 M)	• • •	5 LB (2.3 KG)	AL-C0000
	Ø 8" (0.200 M)	• • •	9.6 LB (4.4 KG)	AL-C0002
Q SCREW JACK	MAX. HEIGHT OF 16" (0.406 M)	• • •	2.4 LB (1.1 KG)	AL-J0001
	MAX. HEIGHT OF 24 1/4" (0.615 M)	• • •	3.1 LB (1.4 KG)	AL-J0002
R SWIVEL BASE PLATE	6" X 6" (0.152 X 0.152 M)	• • •	1.42 LB (0.6 KG)	AL-A0000
R ADJUSTABLE OUTRIGGER	5' 8 1/8" TO 8' 1/8" (1.730 TO 2.440 M)	• • •	11.4 LB (5.2 KG)	AL-O0000
S OUTRIGGER	6' 3/4" (1.849 M)	• • •	8.8 LB (4 KG)	AL-O0001
	10' 6" (3.200 M)	• • •	15 LB (6.8 KG)	AL-O0002
T IN-LINE CLAMP	Ø 1.99" (0.505 M) (C/C 2 5/8")	• • •	1.2 LB (0.5 KG)	AL-A0001

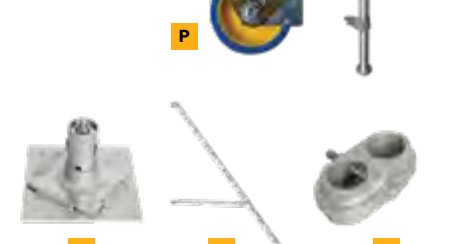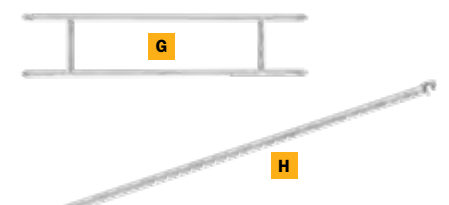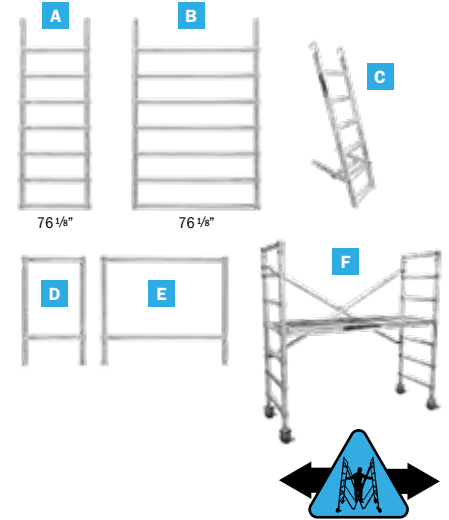

*Maximum load capacity: 25 lb/sq.ft. (122 kg/m²)

ALUMINUM TOWER SPAN 400 KITS



COMPATIBLE:

Instant Upright, Alufuse
and Vault Scaffolding.†

STANDARDS:

Meets ANSI/ASSE A10.8 - 2011
OSHA 29CFR Part 1926
CAN/CSA S269.2



The kits shown below are for 8'-2 1/4" (2.5 m) platform lengths. They give an example of the quantity of items required for assembly. Equivalent kits for 6'-6 3/4" and 10' platform lengths are also available. Please refer to the next page to obtain the item number corresponding to the desired platform length.

For any assistance, please contact customer service.

SPAN 400 NARROW TOWER KITS

MODEL	MAXIMUM PLATFORM HEIGHT	WEIGHT	LOAD CAPACITY	TOWER KIT DIMENSIONS (W x D x H)	COMPONENTS										
					NARROW FRAME AL-F4002	NARROW GUARDRAIL AL-G4000	GUARDRAIL BRACING AL-G4101	DIAGONAL BRACE AL-D0002	HORIZONTAL BRACE AL-B0002	TRAPDOOR PLATFORM AL-P0002	NARROW TOEBOARD AL-T0102	POLYURETHANE CASTER AL-C0002	SCREW JACK AL-J0001	ADJUSTABLE OUTRIGGER AL-O0000	OUTRIGGER AL-O0002
AL-K4007	13'-9 3/8" (4.2 M)	321 LB (146 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 17'-4 3/8" (2.496 X 0.677 X 5.292 M)	4	2	2	4	5	2	1	4	4	4	0
AL-K4013	20'-8" (6.3 M)	451 LB (205 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 24'-3" (2.496 X 0.677 X 7.392 M)	6	2	2	7	9	3	1	4	4	4	0
AL-K4019	27'-2 3/4" (8.3 M)	521 LB (237 KG)	1,587 LB (720 KG)	8'-2 1/4" X 26 5/8" X 30'-9 3/4" (2.496 X 0.677 X 9.392 M)	8	2	2	9	13	4	1	4	4	0	4

SPAN 400 WIDE TOWER KITS

MODEL	MAXIMUM PLATFORM HEIGHT	WEIGHT	LOAD CAPACITY	TOWER KIT DIMENSIONS (W x D x H)	COMPONENTS											
					WIDE FRAME AL-F4005	WIDE GUARDRAIL AL-G4001	GUARDRAIL BRACING AL-G4101	DIAGONAL BRACE AL-D0002	HORIZONTAL BRACE AL-B0002	PLATFORM AL-P0101	TRAPDOOR PLATFORM AL-P0002	WIDE TOEBOARD SET AL-T0103	POLYURETHANE CASTER AL-C0002	SCREW JACK AL-J0001	ADJUSTABLE OUTRIGGER AL-O0000	OUTRIGGER AL-O0002
AL-K4028	13'-9 3/8" (4.2 M)	477 LB (217 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 17'-4 3/8" (2.496 X 1.290 X 5.292 M)	4	2	2	8	5	2	2	1	4	4	4	0
AL-K4034	20'-8" (6.3 M)	631 LB (287 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 24'-3" (2.496 X 1.290 X 7.392 M)	6	2	2	12	9	3	3	1	4	4	4	0
AL-K4040	27'-2 3/4" (8.3 M)	786 LB (375 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 30'-9 3/4" (2.496 X 1.290 X 9.392 M)	8	2	2	15	13	4	4	1	4	4	4	0
AL-K4046	34'-1 1/2" (10.4 M)	954 LB (434 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 37'-8 1/2" (2.496 X 1.290 X 11.492 M)	10	2	2	20	17	5	5	1	4	4	0	4
AL-K4052	41'-0 1/8" (12.5 M)	1108 LB (503 KG)	1,587 LB (720 KG)	8'-2 1/4" X 50 3/4" X 44'-7 1/8" (2.496 X 1.290 X 13.592 M)	12	2	2	24	21	6	6	1	4	4	0	4

† All trademarks and registered trademarks listed above are the property of their respective owners.

SPAN 400 KITS

DESCRIPTION		DIMENSIONS	WEIGHT	MODEL
FRAME				
A	NARROW	26 5/8" X 48 7/8" (0.677 X 1.243 M)	8.8 LB (4 KG)	AL-F4000
		26 5/8" X 65 1/4" (0.677 X 1.657 M)	18.6 LB (8.4 KG)	AL-F4001
		26 5/8" X 81 5/8" (0.677 X 2.072 M)	16.4 LB (7.4 KG)	AL-F4002
B	WIDE	50 3/4" X 48 7/8" (1.290 X 1.243 M)	13 LB (5.9 KG)	AL-F4003
		50 3/4" X 65 1/4" (1.290 X 1.657 M)	16.7 LB (7.6 KG)	AL-F4004
		50 3/4" X 81 5/8" (1.290 X 2.072 M)	20.6 LB (9.3 KG)	AL-F4005
C	6-STEPS LADDER WITH LATCH	78.7" (2 M)	14 LB (6.4 KG)	AL-L0002
D	NARROW WITH LADDER SPAN	26 5/8" X 81 5/8" (0.677 X 2.072 M)	23.3 LB (10.6 KG)	AL-F4101
E	WIDE WITH LADDER SPAN	50 3/4" X 81 5/8" (1.290 X 2.072 M)	27.7 LB (12.6 KG)	AL-F4103
GUARDRAIL FRAME				
F	NARROW WITH UPPER PIN SYSTEM	26 5/8" X 27 5/8" (0.677 X 0.703 M)	6.4 LB (2.9 KG)	AL-G4000
G	WIDE WITH UPPER PIN SYSTEM	50 3/4" X 27 5/8" (1.290 X 0.703 M)	8 LB (3.6 KG)	AL-G4001

COMPONENTS

DESCRIPTION		DIMENSIONS	COMPATIBLE			WEIGHT	MODEL
GUARDRAIL AND BRACE			2 M	2.5 M	3 M		
H	GUARDRAIL	6' 3 1/4" (1.912 M) (C/C)	•			11.3 LB (5.1 KG)	AL-G4100
		8' 2 1/4" (2.496 M) (C/C)		•		13 LB (5.9 KG)	AL-G4101
		10' (3.048 M) (C/C)			•	14.5 LB (6.6 KG)	AL-G4102
I	BRACE DIAGONAL	6' 10" (2.084 M) (C/C)	•			4 LB (1.8 KG)	AL-D0001
		8' 7 1/2" (2.630 M) (C/C)		•		4.8 LB (2.2 KG)	AL-D0002
		10' 4 3/8" (3.158 M) (C/C)			•	5.5 LB (2.5 KG)	AL-D0003
J	BRACE HORIZONTAL	6' 3 1/4" (1.912 M) (C/C)	•			3.7 LB (1.7 KG)	AL-B0001
		8' 2 1/4" (2.496 M) (C/C)		•		4.4 LB (2 KG)	AL-B0002
		10' (3.048 M) (C/C)			•	5.3 LB (2.4 KG)	AL-B0003

ALUMINUM PLATFORM

K	WITH ANTI-SLIP PLYWOOD DECK*	6' 3 1/4" X 24" (1.912 X 0.609 M)	•			30.4 LB (13.8 KG)	AL-P0100
		8' 2 1/4" X 24" (2.496 X 0.609 M)		•		37.9 LB (17.2 KG)	AL-P0101
		10' X 24" (3.048 X 0.609 M)			•	43.3 LB (19.7 KG)	AL-P0102
L	WITH TRAPDOOR AND ANTI-SLIP PLYWOOD DECK*	6' 3 1/4" X 24" (1.912 X 0.609 M)	•			31 LB (14.1 KG)	AL-P0001
		8' 2 1/4" X 24" (2.496 X 0.609 M)		•		38.5 LB (17.5 KG)	AL-P0002
		10' X 24" (3.048 X 0.609 M)			•	44 LB (20 KG)	AL-P0003
M	WITH CHECKER PLATE DECK	6' 3 1/4" X 24" (1.912 X 0.609 M)	•			13.8 LB (6.3 KG)	AL-P1001
		8' 2 1/4" X 24" (2.496 X 0.609 M)		•		17.2 LB (7.8 KG)	AL-P1003
		10' X 24" (3.048 X 0.609 M)			•	19.7 LB (8.9 KG)	AL-P1005
N	WITH TRAPDOOR AND CHECKER PLATE DECK	6' 3 1/4" X 24" (1.912 X 0.609 M)	•			14.1 LB (6.4 KG)	AL-P1000
		8' 2 1/4" X 24" (2.496 X 0.609 M)		•		17.5 LB (7.9 KG)	AL-P1002
		10' X 24" (3.048 X 0.609 M)			•	20 LB (9.1 KG)	AL-P1004


WOODEN TOEBOARD SET

O	NARROW	6' 3 1/4" X 27 1/8" (1.912 X 0.689 M)	•			15 LB (6.8 KG)	AL-T0100
		8' 2 1/4" X 27 1/8" (2.496 X 0.689 M)		•		18.8 LB (8.4 KG)	AL-T0102
		10' X 27 1/8" (3.048 X 0.689 M)			•	21.6 LB (9.8 KG)	AL-T0104
	WIDE	6' 3 1/4" X 51 1/8" (1.912 X 1.298 M)	•			19.1 LB (8.7 KG)	AL-T0101
		8' 2 1/4" X 51 1/8" (2.496 X 1.298 M)		•		25.3 LB (11.5 KG)	AL-T0103
		10' X 51 1/8" (3.048 X 1.298 M)			•	31.7 LB (14.4 KG)	AL-T0105

UNIVERSAL COMPONENTS

P	SWIVEL POLYURETHANE CASTER	Ø 5" (0.125 M)	•	•	•	5 LB (2.3 KG)	AL-C0000
		Ø 8" (0.200 M)	•	•	•	9.6 LB (4.4 KG)	AL-C0002
Q	SCREW JACK	16" (0.406 M)	•	•	•	2.4 LB (1.1 KG)	AL-J0001
		24 1/4" (0.615 M)	•	•	•	3.1 LB (1.4 KG)	AL-J0002
R	SWIVEL BASE PLATE	6" X 6" (0.152 X 0.152 M)	•	•	•	1.42 LB (0.6 KG)	AL-A0000
	ADJUSTABLE OUTRIGGER	5'8 1/8" TO 8' 1/8" (1.730 TO 2.440 M)	•	•	•	11.4 LB (5.2 KG)	AL-O0000
S	OUTRIGGER	6' 3/4" (1.849 M)	•	•	•	8.8 LB (4 KG)	AL-O0001
		10' 6" (3.200 M)	•	•	•	15 LB (6.8 KG)	AL-O0002
T	IN-LINE CLAMP	Ø 1.99" (0.505 M) (C/C 2 5/8")	•	•	•	1.2 LB (0.5 KG)	AL-A0001

*Maximum load capacity: 25 lb/sq.ft. (122 kg/m²)

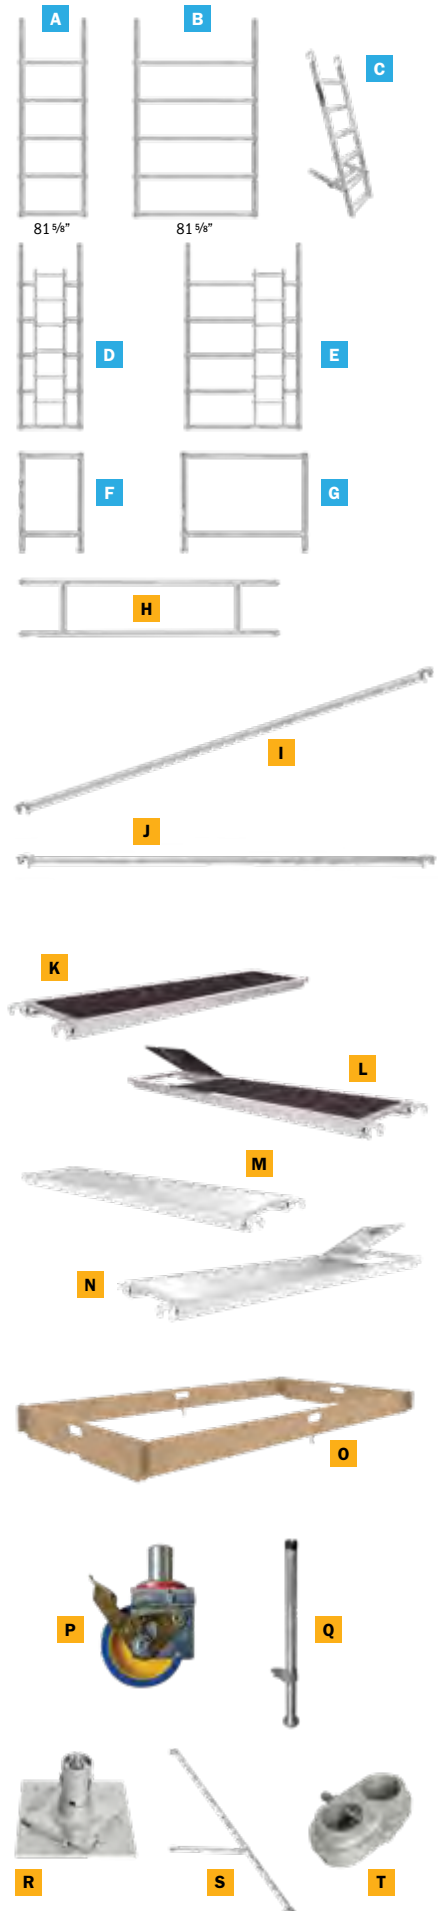

CUSTOM DESIGN AND FABRICATION

Although our aluminum scaffolding systems are highly versatile, sometimes it is necessary to develop custom solutions to meet your specific needs. Whether you need to build access around a machine or equipment and have specific dimensions to meet, our engineering and design team are here to give you all the necessary support for the success of your personalized projects. Complemented by our qualified custom workshop, our customization service can quickly proceed from a simple scaffolding frame modification to the creation of a complete access system that matches your project. We have been manufacturing scaffolding since 1960, we have the expertise you can trust!



CWB CERTIFIED WELDERS
(CANADIAN WELDING BUREAU)



EXPERIENCED ENGINEERS



EXPERIENCED DESIGNERS




EXPERIENCED MANUFACTURER



ON SITE TESTING LABORATORY




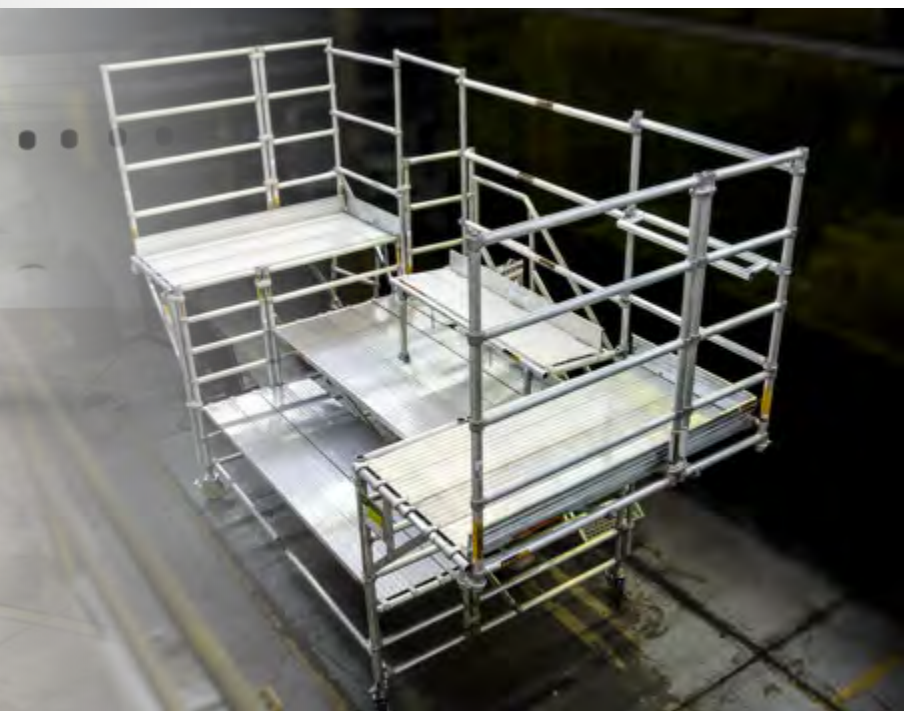

THEATER



INSTITUTIONAL

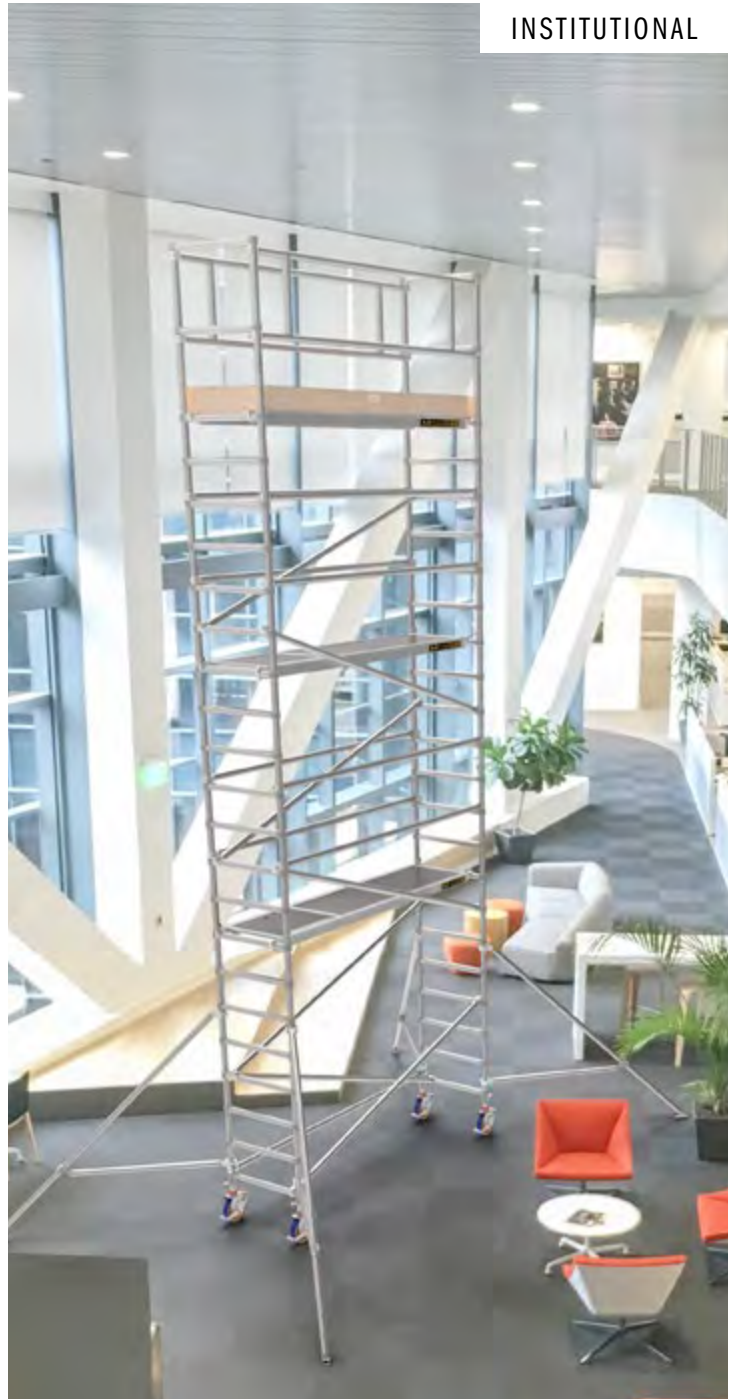

UTILITY



AERONAUTIC




CONSTRUCTION



INDUSTRIAL



COMMERCIAL

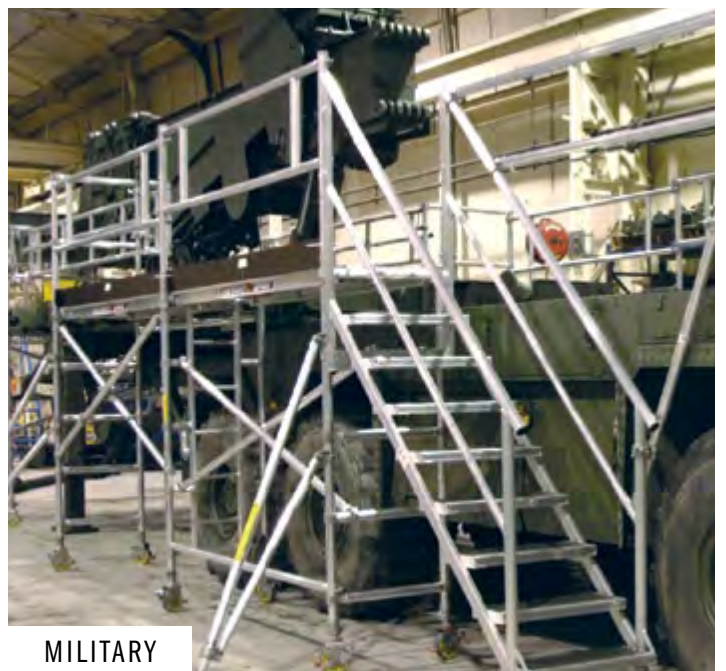

MILITARY



MASS TRANSIT



**MORE PROJECTS
ONLINE** SCAN OR VISIT:
WWW.METALTECH.CO

ALUMINUM TOWER SYSTEMS - CUSTOM ACCESS SOLUTIONS - MODULAR ACCESS FOR AVIATION

CUSTOMER SERVICE

T : **1 800 363-7587** (TOLL FREE NUMBER)

F : **1 866 517-7585**

@ : **CS@METALTECH.CO**



Distributed by:

