



NON-APPAREL SAFETY PRODUCTS

THE ROAD TO SAFETY



TRAFFIC SAFETY

Common Features

- Soft, high-quality, injection-moulded PVC
- Hi-viz colour with UV protection
- One-piece design for strength and durability
- Bounce back to shape when run over
- Superior strength and flexibility
- Durable heavy, black rubberized bases
- Stable, wide-body design
- Stackable for easy storage
- 100% recyclable design



18" Premium PVC Flexible Safety Cone

- Factory-attached high-luminance Type 3 band for superior visibility
- 3 lbs (1.36 kg)

PROD. NO.	MOD. NO.	Colour	Height
V6200350	181	Orange	18" (45 cm)

18" Premium PVC Flexible Safety Cone

- No band
- 3 lbs (1.36 kg)

PROD. NO.	MOD. NO.	Colour	Height
V6200450	181P	Orange	18" (45 cm)



12" Premium PVC Flexible Safety Cone

- No band
- 1.32 lbs (0.6 kg)

PROD. NO.	MOD. NO.	Colour	Height
V6200150	180P	Orange	12" (30.5 cm)



28" Premium PVC Flexible Safety Cone

- Factory-attached 4" and 6" high-luminance Type 3 bands for superior visibility
- 7 lbs (3.1 kg)

PROD. NO.	MOD. NO.	Colour	Height
V6200550	183	Orange	28" (70 cm)

28" Premium PVC Flexible Safety Cone

- No bands
- 7 lbs (3.1 kg)


PROD. NO.	MOD. NO.	Colour	Height
V6200650	183P	Orange	28" (70 cm)



Connecting Rod

- Single-side extendable from 3.3 to 7 ft (1 to 2.13 m)
- Durable, lightweight, retractable
- For temporary barricading applications
- Reflective bands for enhanced visibility
- Loops at each end for use with any standard cone

PROD. NO.	MOD. NO.	Colour	Length
V6201010	189	Red and White	3.3-7 ft (1-2.13 m)

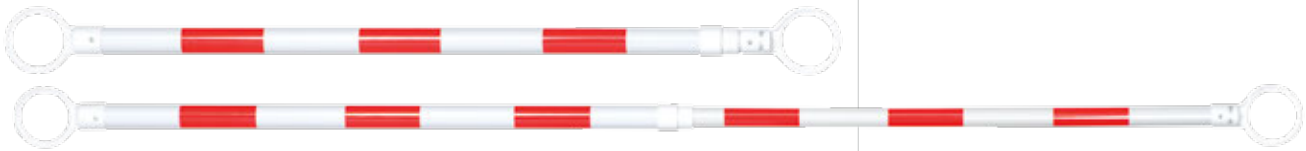

T-Top 47" Delineator Post

- High-visibility reflective post
- 2 4-inch high-intensity Type 3 reflective bands at the top of the post
- 2-piece construction for compact storage
- UV inhibitors resist fading
- Top can be used to tie barricade tape or to support standard barricade lights

PROD. NO.	MOD. NO.	Colour	Height
V6210150	191	Orange	47" (119.4 cm)

Loop Top 44" Delineator Post

- High-visibility reflective post
- 2 4-inch high-intensity Type 3 reflective bands at the top of the post
- 2-piece construction for compact storage
- UV inhibitors resist fading
- Easy-carry hand hold on pole bottom
- Top can be used to tie barricade tape or to support standard barricade lights

PROD. NO.	MOD. NO.	Colour	Height
V6210250	192	Orange	44" (111.3 cm)

Delineator Base (sold separately)

- Rubber
- Easy-carry hand hold

PROD. NO.	MOD. NO.	Colour	Weight
V6220170	201	Black	11 lbs (5 kg)
V6220270	202	Black	13.2 lbs (6 kg)
V6220370	203	Black	17.6 lbs (8 kg)



201

202

203



Bases sold separately

191

192



TRAFFIC SAFETY

Double-Sided Wheel Chock

- For loading dock safety
- Rugged rubber with safe, secure grip
- Resilient rubber compound reinforced for maximum wearability and strength
- Traditional eyebolt for sturdy security chain connection
- 9 lbs (4 kg)

PROD. NO.	MOD. NO.	Colour	Dimensions, LxWxH
V6220870	298	Black	9.75" x 8" x 6" (248 cm x 203 cm x 152 cm)

NEW


Barricade Light

- Can be used with delineator post, traffic drum or A-frame barricade using 175B bolt in middle of battery holder
- Tough 7" polycarbonate lens with advanced optics for increased visibility
- Tamper-proof switch
- On at dusk, off at dawn photo sensor
- Two settings, steady on or flashing
- LED flashing rate of 65 times per minute
- 360° swivel head
- Uses 2 4R25 6V lantern batteries (not included)

PROD. NO.	MOD. NO.	Colour	Sizes
V6020260	177	Yellow	O/S



Barricade Light

- Can be used with delineator post, traffic drum or A-frame barricade using 175B bolt in middle of battery holder
- 7" standard lens with advanced optics for increased visibility
- Tamper-proof switch
- On at dusk, off at dawn photo sensor
- Two settings, steady on or flashing
- LED flashing rate of 65 times per minute
- 360° swivel head
- Uses 4 D-cell batteries (not included)

PROD. NO.	MOD. NO.	Colour	Sizes
V6020360	176	Yellow	O/S



Extra-Long 4.5" Bolt

- For attaching barricade lights to delineator posts and barricades

PROD. NO.	MOD. NO.	Length
V6020900	175B	4.5" (11.4 cm)

Bilingual Janitorial Floor Sign

- Black safety messages on both sides
- 301 - CAUTION WET FLOOR/ATTENTION PLANCHER MOUILLÉ
- 302 - CAUTION/ATTENTION
- Heavy-duty, durable, reinforced design
- Deluxe hinge/carry handle
- Easy to deploy A-frame design folds flat for easy storage
- 2.9 lbs (1.3 kg)

PROD. NO.	MOD. NO.	Colour	Dimensions, WxH
V6300160	301	Yellow	12" x 29" (30 cm x 68 cm)
V6300260	302	Yellow	12" x 29" (30 cm x 68 cm)



301

302

Snow/Safety Fence

- 777/778 - Heavy-duty 230 GSM (280 g/lm) extruded polyethylene
- 772 - Heavy-duty 200 GSM (240 g/lm) extruded polyethylene
- Strong, heavy-duty construction resistant to wind and snow
- Engineered to control drifting snow and sand
- Strong and durable, will not rust or corrode
- For highways, driveways, ski areas and winter trails, and for construction, excavation and demolition sites

PROD. NO.	MOD. NO.	Colour	Dimensions, WxH
V6010250	777	Orange	50' x 4' (15.2 m x 1.2 m)
V6010450	778	Orange	100' x 4' (30.5 m x 1.2 m)
V6010150	772	Orange	100' x 4' (30.5 m x 1.2 m)

NEW



3-Channel Cable Protector

V6220490 / 286

- Tough, commercial-grade rubber base construction
- Durable, high-visibility, yellow plastic-hinged lid for easy cable access
- Protects multiple cables from pedestrians and car traffic
- 30-ton capacity
- Channel width: 5.7 cm, can accommodate cables up to 50 mm in diameter

NEW



5-Channel Cable Protector

V6220590 / 287

- Tough, commercial-grade rubber base construction
- Durable, high-visibility, yellow plastic-hinged lid for easy cable access
- Protects multiple cables from pedestrians and car traffic
- 30-ton capacity
- Channel width: 3.5 cm, can accommodate cables up to 35 mm in diameter

NEW





SIZING CHART

Body Measurements (not garment measurements)

Jackets, Coveralls, Overalls																						
	XS		S		M		L		XL		2XL		3XL		4XL		5XL		6XL		7XL	
Size	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72	
Chest	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72	
Waist	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66	
Arms	32	33		34		35		36		37		38		39		40		41		42		
Hip	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72	

Pants (overalls are sized based on chest measurements)																						
	XS		S		M		L		XL		2XL		3XL		4XL		5XL		6XL		7XL	
Size	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66	
Waist	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66	
Hip	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72	
Inseam	30.5		31		31.5		32		32.5		33		33.5		34		34.5		35		35.5	

Shirts (select size by neck for closed collar shirts, by chest for open collar shirts)																				
	S		M		L		XL		2XL		3XL		4XL		5XL		6XL		7XL	
Neck	14-14.5		15-15.5		16-16.5		17-17.5		18-18.5		19-19.5		20-20.5		21-21.5		22-22.5		23-23.5	
Chest	34		38		42		46		50		54		58		62		66		70	
Sleeve	33.5		34		34.5		35		35.5		36		36.5		37		37.5		38	

Women's Garment Sizing												
	XS		S		M		L		XL		2XL	
Chest	32		34		36		39		42		45	
Waist	24		26		28		31		34		37	
Arms	29		30		31		32		33		34	
Hip	35		37		39		42		45		48	
Inseam	27		28		29		30		31		32	

All measurements in inches.

Talls in Coveralls are 2 inches longer in the torso and 1 inch longer in the sleeves and legs.

Measurement Directions:

- Neck: Measure around the base of your neck, round up to the next half-inch.
- Chest: Measure around your chest, under the arms and across the shoulder blades, over a shirt if stomach is larger than chest; choose the larger size.
- Waist: Measure around your waist at the level you normally wear your pants, over a shirt.
- Hip: Standing with feet together, measure around the widest part of your hips, parallel to the floor.
- Inseam: Measure a good-fitting pair of pants along the inseam, from crotch seam to bottom edge of cuff.
- Sleeve: Bend arm and place fist on hip. Measure from centre back of your neck, across shoulder and down arm to elbow and then to your wrist. This is your sleeve length.

For working garments, measure liberally to find your size, as you need freedom of movement.

STAR★TECH™

STARTECH™ reflective tape is exclusive to Pioneer safety products. It is designed and tested to far exceed the CSA Z96-09 high-visibility safety apparel reflective tape standard.



STARTECH™ reflective tape has been independently tested to meet:

- CSA Z96-09 High-Visibility Safety Apparel Standard Level 2
- EN ISO 20471 High-Visibility Standard Level 2
- ANSI/ISEA 107-2010 Level 2

STARTECH™ FR tape is made of FR cotton or aramid material as backing and has been independent lab tested to meet:

- CGSB 155.20-2000 Heat-Resistant Test Par. 6.2.3
- CSA Z96-09 High-Visibility Safety Apparel Standard Level 2

The many standards for reflective tapes all require passing a battery of tests that simulate working conditions.

These include measuring the retroreflective performance of STARTECH™ tape after being subjected to: abrasion, multiple flexing, cold temperatures, variable temperatures, multiple washings, wet conditions, and, for the FR version, its heat resistance properties as well. Due to its premium design and quality, STARTECH™ tape not only meets but exceeds all of these standards!



WARRANTY

Garment and Safety Gear

Pioneer warrants all garments to be free of defects in materials and workmanship under the normal use for which the product is intended. Normally, a garment defect of manufacture will show up in the first two months of use.

This warranty is limited to product failure as a result of seam separation, broken snaps or zippers, material delaminating, or any defect in material or workmanship that affects the performance of the garment.

Excluded from this warranty are products that have been affected by cuts or punctures, disfigured from continued wear or use, and products that have been exposed to solvents or excessive heat which may degrade their performance and garments that have not been maintained as per wash care instructions on the garment.

Warranty claims will only be provided for those products that have been made available for inspection by Pioneer. Any warranty claim on garments that have been purchased over 60 days ago will have to be accompanied by pictures and/ or defective garment itself for inspection. To maintain our health and safety standards, all products returned for inspection must be free of all removable debris. Any products returned that do not meet the above conditions will be returned to the customer at their expense.

Pioneer shall not be liable for indirect, special, incidental, or consequential damage or penalties and does not assume liability of purchaser or others for injury to persons or property.

For a warranty claim on a Pioneer garment, please contact your local sales or customer service representative.

Footwear

Pioneer warrants all Ranpro® boots to be free of defects in materials and workmanship under the normal use for which the product is intended. Normally, a boot defect of manufacture will show up in the first two months of use.

This warranty is limited to product failure as a result of splitting, sole or seam separation, or any defect in material or workmanship that affects the waterproof properties or safety characteristics of the product.

Excluded from this warranty are products that have been affected by cuts or punctures or disfigured from continued wear or use, and products that have been exposed to solvents or excessive heat which may degrade their performance.

Warranty claims are subject to inspection by Pioneer. To maintain our health and safety standards, all products returned need to be cleaned of loose debris and contaminants. Any dirty or contaminated boots will be returned to the customer at their expense.

Pioneer shall not be liable for indirect, special, incidental, or consequential damage or penalties and does not assume liability of purchaser or others for injury to persons or property.

For warranty claims on Pioneer Ranpro® boots, please contact your local sales or customer service representative.

